

Electrolytic generation of hypochlorite without additives or auxiliaries.


Hypochlorite Generator

Features

The electrolytic decomposition of chlorine ions in water forms sodium hypochlorite and hydrogen. The sodium hypochlorite turns into hypochlorous acid (HClO) in the water, providing an effective means of disinfection.



Electrolysis device

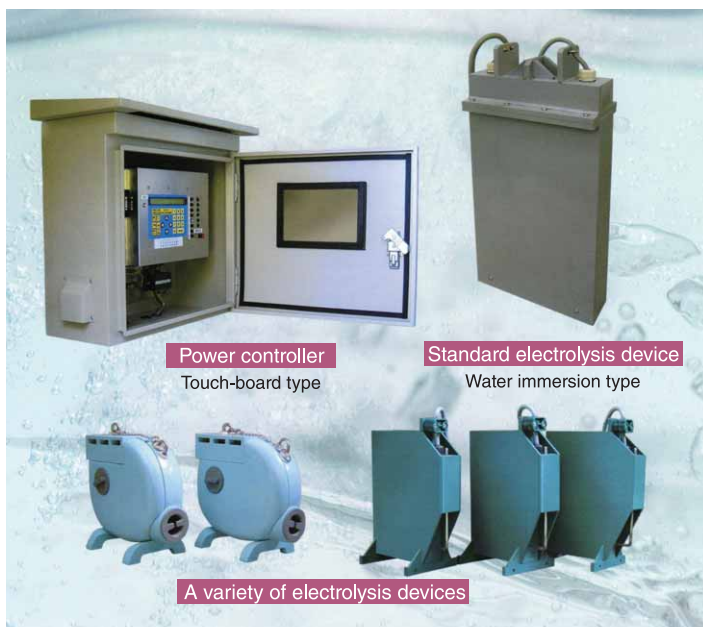

Hypochlorite Generator Models


Overview

(Technical principles, actions, etc.)


Hypochlorite Generator

Tap water normally contains a minute quantity of chlorides. When the chlorine ions are used for non-membrane electrolytic decomposition, chlorine (Cl_2) will be generated from the anode side while NaOH (caustic soda) and hydrogen (H_2) will be produced from the cathode side. The hydrogen in the state of gas will be vented into the atmosphere. The chlorine and caustic soda will react immediately in the liquid, thus producing sodium hypochlorite (NaClO), which will provide a disinfectant effect.

Refer to the diagrams in Principles of **Operation (1)** and **(2)**.

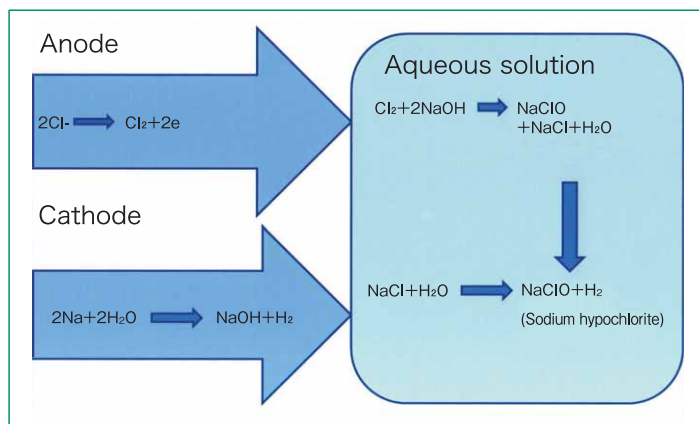

Principle of operation of electrolysis system (1)

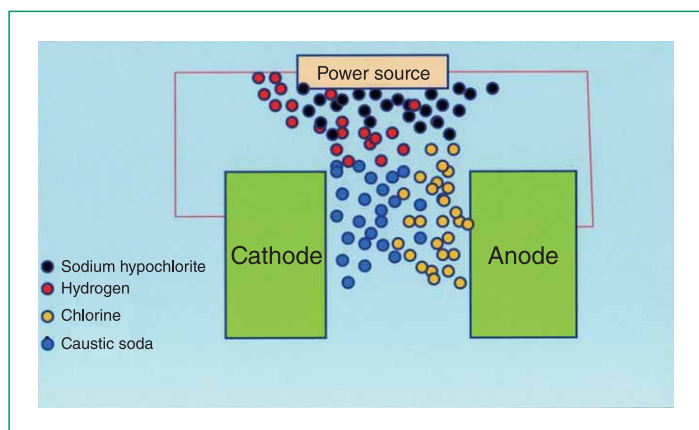

Principle of operation of electrolysis system (2)

Introductory Track Record

- Monks from the Ichinyoan Hermitage of Todaiji Temple in Nara, Japan volunteered to dig wells in Cambodia and secure safe drinking water. Eight-Tec assisted them with the hypochlorite generator.
- Yamaha Motor Co., Ltd. adopted the hypochlorite generator for the disinfection equipment of their mini-water purification plant to secure safe water for domestic use in Indonesia.

Effects

◎Hypochlorite Generator

The chlorine concentrations in water will be decreased if the water is stored in a distribution reservoir or water storage tank. The hypochlorite generator reliably makes drinkable water by increasing the disinfection effect of the water with the use of electrolytic decomposition and boosting the low chlorine concentrations in the water without adding chemical solutions.

Eight-Tec Co., Ltd. 3-7-3 Mitsuya-minami, Yodogawa-ku, Osaka-shi 532-0035

● TEL / +81-6-6308-7517 ● FAX / +81-6-6308-7526 ● E-Mail / info@eight-tec.com ● http://www.eight-tec.com